


ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

Address:NO. 3, Yanhe Road, Boshan, Zibo, Shandong, China
Email:wp@cnjingganrefractory.com/sdwenping@163.com
Contact:Rose Tel/Wechat:+86-13275332819
Tel:86-533-4188518 Fax:86-533-4188518

Fiber Reinforced Type Calcium Silicate Board

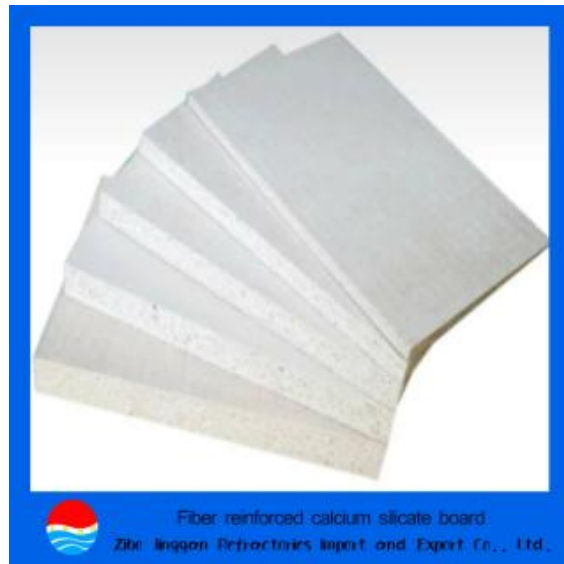

1. Fiber Reinforced Calcium Silicate Board are mainly composed of siliceous and calcareous inorganic mineral raw materials and added with cellulose reinforced materials to make building materials with cemented structure. The product adopts roller pressing, pressure technology, pressure fumigation curing, surface polishing and other treatment processes, the products with mullite crystal structure were formed. The products are asbestos free, non-toxic, tasteless, beautiful, and are decorative plates in the construction industry

2. Product features

- 1) Product fire rating A1, after a fire, the product will not burn, will not produce toxic smoke
 - 2) The product has good fireproof performance. In the high temperature places such as toilet and bathroom, it can keep the performance stable and will not expand or deform
 - 3) The product has high strength, 6 mm thick board and gypsum board with strength greater than 9.5 mm
 - 4) The formula of the product is advanced. It is produced under strict quality control. The Wet Expansion Rate and dry shrinkage rate of the product are completely controlled in the most ideal range
 - 5) The product has good heat insulation performance and good sound insulation and sound absorption effect
 - 6) The product is easy to process and easy to construct
3. Application: wall, ceiling, floor, furniture, sound barrier. Business building, entertainment place, hotel, engineering, station

ZIBO JINGGAN REFRACTORY IMPORT AND EXPORT CO.,LTD

4.Specification:Length:2440mm, 3000mm, Width: 1220mm,Thickness:4-12mm

5. Main parameters of products

ITEM		Unit	Technical idnex
Density		g/m3	≥1.2
Thermal conductivity		w/m.k	≤0.29
Water absorption		%	≤40
Moisture content		%	≤10
Swelling rate		%	≤0.25
Noninflammability			Class A fire protection
Flexural strength, In dry condition	Transverse	Mpa	≥12
	Portrait		≥9

6,Good feedback of product use effect,the products have been exported to South Korea, Russia,Pakistan

7,We are a professional supplier, who can provide customers with free product technology, use and other issues

Do you want to find a professional supplier of refractory products?

Do you want to find a professional supplier of graphite electrodes?

Do you want to find a stable and credible supplier?

Then let's contact with jinggan company

Contact me:

Email:wp@cnjingganrefractory.com/sdwenping@163.com

TEL: 86-0533-4188518 / **FAX:** 86-0533-4188518

Rose:+86-13275332819(wechat/whatsapp number)